

## Floor Standing Type Air Conditioner



Model		KFR-42LW	KFR-60LW	RF-12W
System		C.&H.		C.&H.
Capacity	Cooling/Heating(W)	4200/4500	6000/6200	11500/12000
	Cooling/Heating(Btu/h)	14500/15300	21000/2150	42000/42000
Power Supply (V,Hz)		220-240v, 1PH/50Hz		380v,3PH/50Hz
Power Consumption Cooling/Heating(W)		1780/1700	2580/2500	4800/4600
Indoor Unit	Dimension HxWxD(cm)	168x49x26	172x53x26	190x60x36
	Net Weight(kg)	43	48	60
	Air Flow volume (m3/h)	720	1050	1800
	Noise(H/M/L)dB(A)	≤48	≤52	≤52
Outdoor Unit	Dimensions HxWxD(cm)	69x87x37	84x92x41	12x95x36
	Net Weight (kg)	49	85	110
	Compressor Output(W)	1400	1850	3750
	Noise (H/M/L) dB(A)	≤58	≤58	≤70
Packing Size HxWxD(cm)	Indoor	139x61x38	180x61x35	199x70x45
	Outdoor	75x92x39	105x100x46	140x100x46
Gross Weight(kg)	Indoor	50	55	65
	Outdoor	60	94	125
Quantity per container(sets)	20'	36	28	22
	40'	72	56	46

## Floor Standing Type Air Conditioner

1. The indoor unit, beautiful and tasteful, only need a little space.
2. Advanced high-voltage and electrostatic plastic spraying technology prevents from rust and corrosiveness.
3. Adopting computer control and LED display, reliably and audio-visually.
4. Using famous compressor with high quality and high efficiency, running reliably and quietly.

## Cassette Type

Model		KFR-42QW	KFR-65QW
System		C.&H.	
Capacity	Cooling/Heating(W)	4200/4500	6500/6700
	Cooling/Heating(Btu/h)	14500/15300	22500/23500
Power Supply(V,Hz)		220-240v, 50Hz	
Power Consumption Cooling/Heating(W)		1780/1750	2700/2500
Indoor Unit	Dimensions HxWxD(cm)	57x57x29	31x95x95
	Net Weight(kg)	27	32
	Air Flow volume(m3/h)	720	1200
	Noise (H/M/L) dB(A)	≤40	≤48
Outdoor Unit	Dimensions HxWxD(cm)	69x87x37	86x95x36
	Net Weight(kg)	49	98
	Compressor Output(W)	1500	2400
	Noise (H/M/L) dB(A)	≤54	≤59
Packing Size HxWxD(cm)	Indoor	74x63x32	53x115x105
	Outdoor	75x92x39	100x115x58
Gross Weight(kg)	Indoor	17	42
	Outdoor	60	110
Quantity per container(sets)	20'	63	40
	40'	126	100



The operation moods: Cooling, Heating, Drying, Timing, Fan, Sleep, Auto, etc..




## Window Type Air conditioner

Model	KC-45	KC-50	KC-55	KC-35	KC-25	KC-20	KCD-25	KCD-20
Cooling Capacity	4500W	5000W	5500W	3500W	2500W	2000W	2500W	2000W
Power Supply	220V-0240V-50Hz							
Air Circulation	750m <sup>3</sup> /h	780m <sup>3</sup> /h	850m <sup>3</sup> /h	560m <sup>3</sup> /h	450m <sup>3</sup> /h	420m <sup>3</sup> /h	450m <sup>3</sup> /h	420m <sup>3</sup> /h
Rated Input	2150W	2100W	2550W	1500	980W	785W	980/2100	785/2100
Rated Current	10A	9.85	12A	7.5A	4.8A	3.7A	4.8/9.5A	3.7/9.5A
Net Weight	72kg	75kg	78kg	68kg	42kg	42kg	42kg	42kg
Gross Weight	76kg	80kg	86kg	73kg	45kg	45kg	45kg	45kg
Noise Level Indoor	≤57dB(A)	≤57dB(A)	≤60dB(A)	≤56dB(A)	≤56dB(A)	≤53dB(A)	≤56dB(A)	≤53dB(A)
Outdoor	≤63dB(A)	≤63dB(A)	≤67.5dB(A)	≤62dB(A)	≤62dB(A)	≤59dB(A)	≤62dB(A)	≤59dB(A)
Dimension(DxWxH)	75.6x66x43.6	75.6x66x43.6	75.6x66x43.6	68x56x40		56x52x35	56x52x35	56x52x35

## KC(R) WINDOW AND SPLIT TYPE AIR CONDITIONER

1. Super-quiet structure design makes a novel and ingenious style.
2. The unit cover adopting high-voltage and electrostatic plastic spraying, preventing from corrosiveness and with high strength.
3. Hand-engaged control, easy to operate.
4. Using super-quiet rotary compressor with high efficiency and running reliably and quietly.
5. Heat-exchanger with high efficiency is adopting LOUVERED V-WAFFLE FIN.

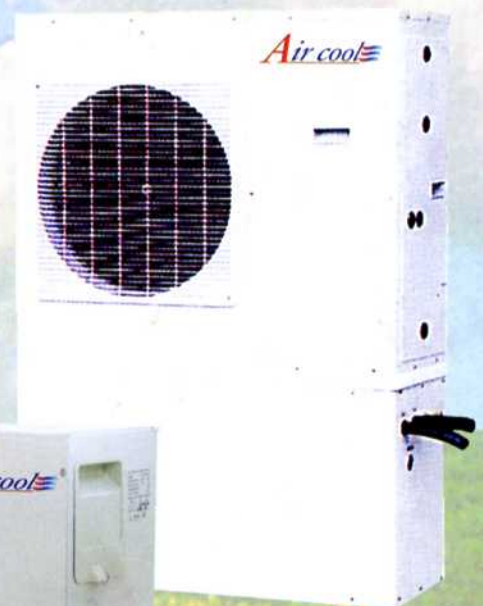

**Florecold Ind. Ltd.**  
**15 Cantons, Vacoas, Mauritius**  
**Tel: 698 0401/698 1133 - fax: (230) 698 1133**  
**E-mail: florecold@Intnet.mu**